

T_{amb} °C	Resistance Ω
-55	490
-50	515
-40	567
-30	624
-20	684
-10	747
0	815
10	886
20	961
25	1000
30	1040
40	1122

T_{amb} °C	Resistance Ω
50	1209
60	1299
70	1392
80	1490
90	1591
100	1696
110	1805
120	1915
130	2023
140	2124
150	2211

Ambient temperature and corresponding average resistance values of sensor ($I_C = 1$ mA).

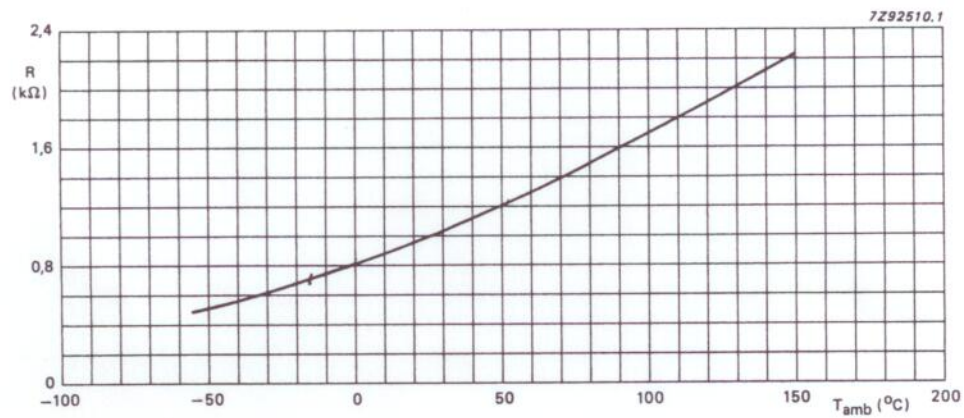


Fig. 2 Average resistance value of sensor at $I_C = 1$ mA as a function of temperature.